




# Door Signage Display

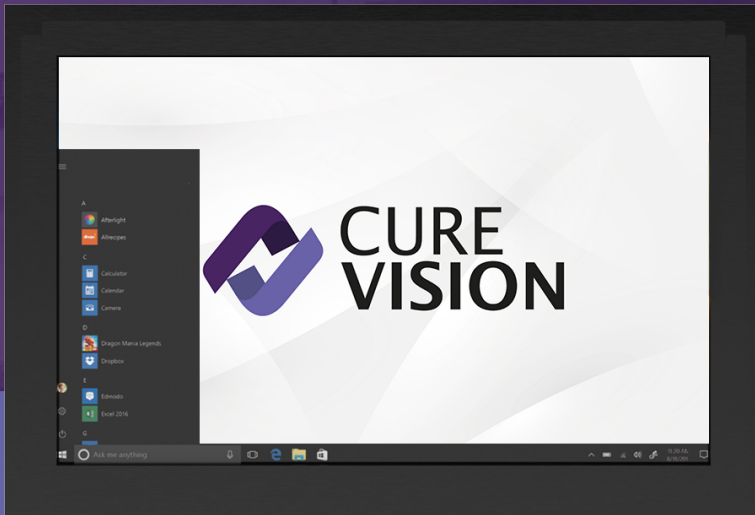

**Area of Usage**  
**POLYCLINIC**

# OPC-317

Using CUREVISION digital door signage, the relevant information is displayed directly from your EHR system, ensuring accurate information is displayed at all times. CureVision digital door signage is beneficial for reducing perceived wait times in waiting areas like emergency rooms and outpatient procedural departments. For example, you can display wait times in emergency rooms by using CUREVISION digital signage.

Make your message concise and visually appealing to increase patient, guest, and visitor satisfaction. Promote other services within the hospital or at other locations through cross-promotion. Provide an update on future expansion and other upcoming services that are going to be added. Provide patients with an introduction to new physicians and staff members.

## Features

- Customizable Color and Design
- Industrial Components for Continuous Operation
- 0-60 ° C Working Temperature
- Instant Connection Analysis and Solution Support Via Remote Connection



## ORDER CODE

CPU	: J1900
Feed	: 110/220V AC, 12/24V DC, POE
RAM	: 4GB / 8GB
HDD	: HDD 320GB / SSD 32GB / SSD 64GB
Wi-Fi	: Optional

## SYSTEM

CPU	: Intel® Celeron™ Processor J1900 Low Power Fanless
Cache	: 2 MB
Memory	: 2 x DDR3 SoDIMM max. 4GB / 8GB
Video RAM	: Max. 128 MB Shared Memory
Chipset	: By CPU
Watchdog Timer	: 255 Level Reset
System Fan	: 1 x 4cm / 10CFM

## INPUT/OUTPUT

Serial Port	: 3 x RS232
USB Port	: 4 x USB 2.0
LAN	: 2 x Realtek RTL8111G Gigabit LAN with ESP
Wireless LAN	: 802.11 b / g (Optional)
Audio	: Line In & Out (AC'97 Codec Audio)
Expansion Slot	: MiniPCle
Keyboard/Mouse	: N.A.

## DATA STORAGE

HDD Type	: Vibration Resistant Slot
HDD Storage	: 64 GB / 128GB / 256 GB SSD

## FEED

Input	: 110/220V AC, 12/24V DC, POE
Adapter	: Adapter Included

## LCD SCREEN

Size / Type	: 17" / 4:3
Max. Resolution	: 1280x1024, XGA
Pixel Pitch	: 0.297mm x 0.297mm
Max. Color	: 16.7 M
Brightness	: 350cd
Contrast Ratio	: 1000/1
Viewing Angle	: 160°(H),160°(V)
Back Light MTBF	: 50,000 Hours
Touch Screen	: Optional

## VIDEO OUTPUT

Type	: HDMI
Max. Resolution	: 1600x1200 @ 60Hz

## ENVIRONMENTAL FEATURES

Working Temp	: 0 ~ 60°C
Storage Humidity	: 5 ~ 95% (non-condensing)
Case	: Heavy Duty Metal Case
Front Frame	: Glass
Weight	: Variable According to Monitor Size
Dimensions	: Variable According to Monitor Size
Mounting	: Built-In

